



pietra

technical characteristics

TECHNICAL FEATURES	SPECIFICATION	VALUE REQUIRED	*OUR VALUES (SETSCO)
LENGTH AND WIDTH	ISO 10545-2	±0.6%	0.07%
THICKNESS	ISO 10545-2	±5.0%	- 0.16%
SQUARENESS	ISO 10545-2	±0.5%	0.04%
STRAIGHTNESS OF THE EDGES	ISO 10545-2	±0.5%	0.01%
FLATNESS	ISO 10545-2	±0.5%	0.13%
WATER ABSORPTION	ISO 10545-3	≤0.5%	0.32%
BREAKING STRENGTH MODULUS OF RUPTURE	ISO 10545-4	≥1300 N ≥35 N/mm ²	1620.1 N 38.6 N/mm ²
CHEMICAL RESISTANCE	ISO 10545-13	TEST METHOD AVAILABLE DECLARED VALUE	GA/GLA
RESISTANCE TO STAINING	ISO 10545-14	TEST METHOD AVAILABLE DECLARED VALUE	CLASS 5
SLIP RESISTANCE INCLINED PLATFORM	DIN 51130 DIN 51097	TEST METHOD AVAILABLE	R10 MATT R11 ANTISLIP



size, weight and packaging



SIZE	PIECES/BOX	MQ/BOX	KG/BOX	MQ/PALLET	KG/PALLET	BOX/PALLET
60x60	4	1.44	31	57.6	1265	40
30x60	8	1.44	31	57.6	1265	40
30x30	16	1.44	31	57.6	1265	40

THICKNESS 10mm RECTIFIED



www.heritageceramics.com

SILVERSTONE

SERIES



NOCE



ANTHRACITE




BIANCO




GRIGIO



NOCE

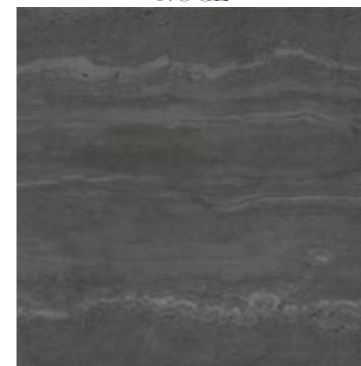

ANTHRACITE

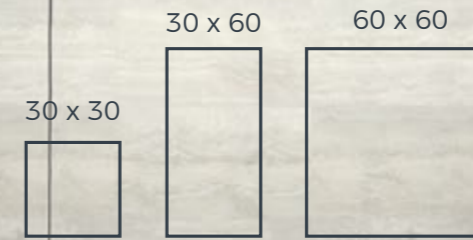

Matt . Lappato . Antislip

9 faces . 4 colors . 3 sizes

SILVERSTONE SERIES

BIANCO & GRIGIO