



pietra

technical characteristics

	TECHNICAL FEATURES	SPECIFICATION	VALUE REQUIRED	*OUR VALUES (SETSCO)
	LENGTH AND WIDTH	ISO 10545-2	± 0.6%	0.07%
	THICKNESS	ISO 10545-2	± 5.0%	- 0.16%
	SQUARENESS	ISO 10545-2	± 0.5%	0.04%
	STRAIGHTNESS OF THE EDGES	ISO 10545-2	± 0.5%	0.01%
	FLATNESS	ISO 10545-2	± 0.5%	0.13%
	WATER ABSORPTION	ISO 10545-3	≤ 0.5%	0.32%
	BREAKING STRENGTH MODULUS OF RUPTURE	ISO 10545-4	≥ 1300 N ≥ 35 N/mm²	1620.1 N 38.6 N/mm²
	CHEMICAL RESISTANCE	ISO 10545-13	TEST METHOD AVAILABLE DECLARED VALUE	GA/GLA
	RESISTANCE TO STAINING	ISO 10545-14	TEST METHOD AVAILABLE DECLARED VALUE	CLASS 5
	SLIP RESISTANCE INCLINED PLATFORM	DIN 51130 DIN 51097	TEST METHOD AVAILABLE	R10 MATT R11 ANTISLIP


size, weight and packaging

						
SIZE	PIECES/BOX	MQ/BOX	KG/BOX	MQ/PALLET	KG/PALLET	BOX/PALLET
60x60	4	1.44	31	57.6	1265	40
30x60	8	1.44	31	57.6	1265	40
30x30	16	1.44	31	57.6	1265	40

THICKNESS 10mm RECTIFIED



GEMS
SERIES

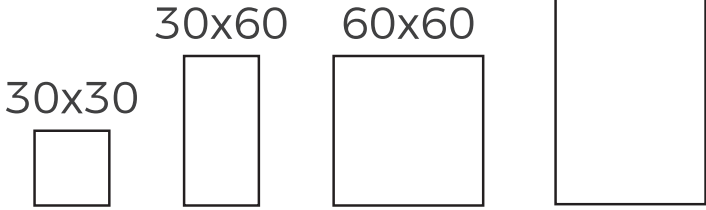

PALOMA



Antique . Matt .
Polished . Antislip

9 faces . 4 designs



PALOMA



CALACATTA



CARRARA



SILVERMINK

GEMS
SERIES

SILVERMINK (COUNTERTOP)
PALOMA (BAR-COUNTER)
ANTIQUE CARRARA (FLOOR)